

Stainless Fountain

Smart and sleek, stainless steel water fountains for the most demanding applications. The F20SS dispenses chilled water using a robust anti-tamper bubbler and carafe filler. The system uses state-of-the-art on-demand water chilling technology, ensuring superior capacity and efficient energy usage.

SPECIFICATIONS

Model	F20SS
Pressure Range	100 - 400* kPa
Temperature Range	0 - 38° C (protect from freezing)
Drain Port	40 mm socket to suit DWV Pipe/Fittings
Dispenses	Cold Water Only
Faucet	Swan Neck Tap & Bubbler
Function	Cooling
Voltage	220 - 240V
Frequency	50/60 Hz
Cooling Capacity	20 Lph
Input Power	120W
Upper Cover	SS304, Thickness 0.8 mm, rim inside pressed
Shell Housing Material	SS304, Thickness 1 mm
Inlet Connection	3/4" BSP Male Water Connection
Power Cord Length	2m
Refrigerant	R134a
Cold Tank	5L, Built-in evaporator
Adjustable Feet	Yes
Warranty	1 year^

^1 Year warranty is 1 year parts and labour. * Where line pressure exceeds 400 kPa, an approved pressure limiting device must be installed (350 kPa limiting valve is recommended for F20SS) and must also comply with Australian & New Zealand Plumbing Standards. (Ref. AS/NZS 3500.1:2021, Clause 3.3.4).



Stainless Fountain

FEATURES & BENEFITS

Includes vandal-resistant bubbler, with an integrated guard to protect against contamination, airborne deposits, and tampering.

Produces water chilled to 4 - 12°C for a refreshing cool drink.

Mechanically activated push-button activations continue to provide water even when electrical service is not available.

Comes with a bubbler and carafe filler tap.

Manufactured to the highest standards and will provide years of trouble-free service. Constructed in 304 stainless steel and it is built to last.

APPLICATIONS

Schools

Airports

Factories


Gyms

Offices

Hospitals

Other commercial high demand applications.

PRODUCT DIMENSIONS (mm)

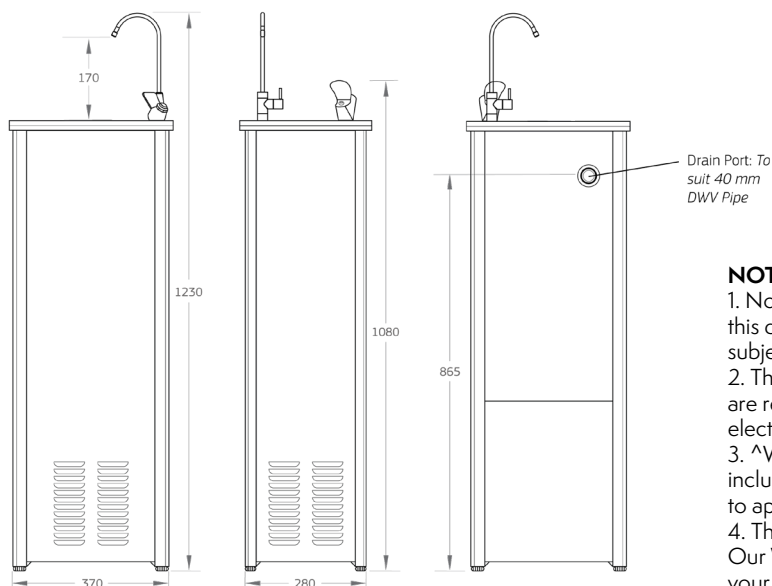

NOTE:

1. No claims can be made based on the specifications and images in this document. The design, technology, colours, features and prices are subject to change.
 2. This document and all its contents are copyright protected. All rights are reserved, particularly alteration, translation and reproduction using electronic systems.
 3. ^Warranties in this document cover parts for the period stated and include 1 year cover for labour for the first year where applicable, subject to approval.
 4. The F20SS is suited for indoor installations only.
- Our Water Treatment Specialists can provide you with advice to suit your needs.